




DIMENSIONS & SPECS

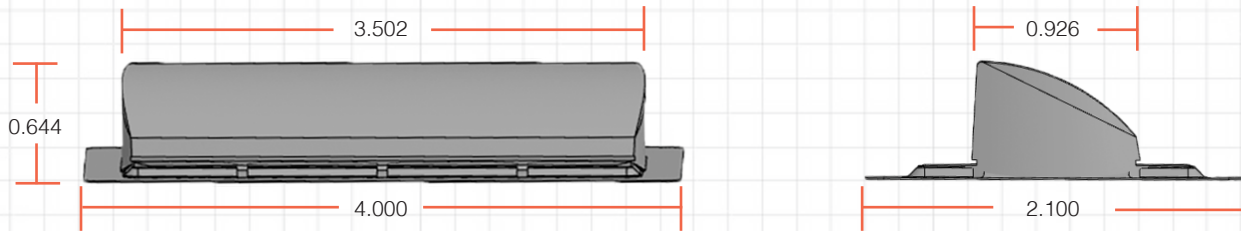

IC TYPE: Impinj Monza R6

OPERATING FREQUENCY: Global (860 - 960 MHz)

MAX READ DISTANCE: Up to 6.1 m (20 ft On-Metal)

MEMORY: EPC 96 bit

INTERFACE PROTOCOL: EPCglobal UHF Class 1 Gen 2 (ISO 18000-6C)

OPERATING TEMP: -40° to +93°C (-40° to +200°F)

TECHNOLOGY & CAPABILITIES



ON METAL & FSMA COMPLIANT

Long read range, UHF Passive RFID tag with exceptional on metal performance

FORM FITTED ATTACHMENT

Flexes & contours. Spot welded to keep it in place. Guaranteed form fit to your asset

HIGH IMPACT DURABILITY

Built for caustic sterilization, high pressure, UV exposure, and rapid temperature shifts

ADDITIONAL FEATURES



STAINLESS STEEL WELD RING

Durable and resilient to guarantee your tag stays in place.



HUMAN READABLE BARCODE

Multiple ways of identifying assets so there are no excuses.



TEMP | CHEMICAL RESISTANT

No matter what environment or cleaning process, your tag will remain reliable.



CUSTOM BRANDING

Keep your brand front of mind by adding your logo & tagline.